


ALARM/WARNING LIGHT

NAVIGATION KNOB AND BUTTON

OZONE SAMPLE INLET/OUTLET

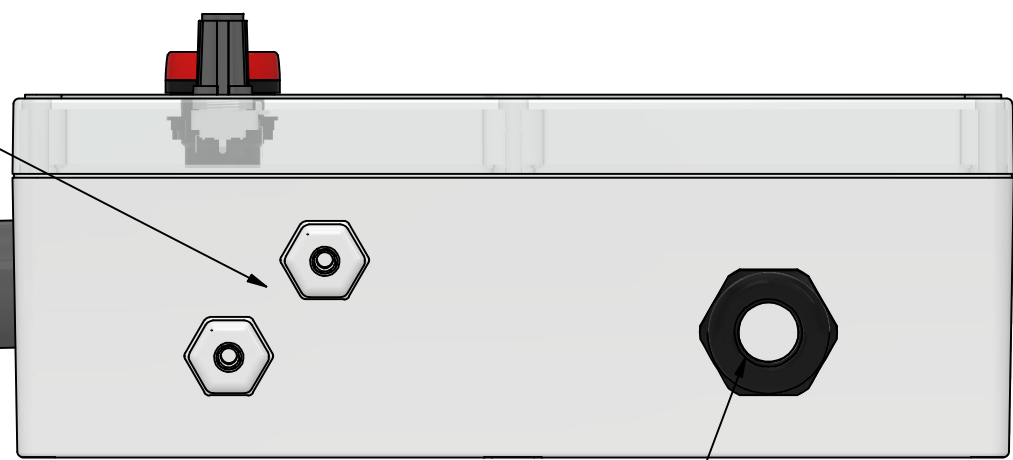

WATERTIGHT CABLE GLAND  
PROVIDE 120VAC or 24VDC POWER

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	Initial Release	6/19/2024	J. Kravitz

- Notes:
1. Max Power Consumption 25 Watts
  2. 0.21 FLA at 120VAC
  3. Ozone Sensitivity Range 0.0-1.0 PPM
  4. User configurable alarm setpoints.
  5. 2 NO/NC Alarm Relays; latching/non latching configurable.
  6. This drawing is for design support purposes only. This is not a manufacturing drawing.

PLEASE BE ADVISED ANY DISTRIBUTION, COPYING, OR SHARING OF ANY INFORMATION IN THIS FILE WITH A THIRD PARTY OR OUTSIDE PARTY IS STRICTLY PROHIBITED, AND MAY RESULT IN LEGAL ACTION.

<p>TOLERANCES UNLESS OTHERWISE SPECIFIED DIM ARE IN INCHES TOL ON ANGLE ± 1° 2 PL ± .10 3 PL ± .005 X/X ± 1/16" INTERPRET DIM AND TOL PER ASME Y14.5 2018</p>			
<p>THIRD ANGLE PROJECTION</p>		<p>TITLE Specification Sheet Specification Sheet, Telchine Ambient Monitor</p>	
<p>SIZE B</p>	<p>DWG NO DS-SS-TE-AMBO3</p>	<p>REV A</p>	
<p>SCALE 1 / 2</p>	<p>SHEET 1 OF 1</p>		